Installation

1) Rough In Backbox must be installed flush to surface area.

2) Run wire though wiring hole located in the middle of the back box. Secure firmly. *See Fig-1*

Note: We recommend that you use silicone sealer to protect the wiring around the hole.

3) **See Fig-2** for wiring instructions.

4) Mount the unit back into the back box. **See Fig-3**

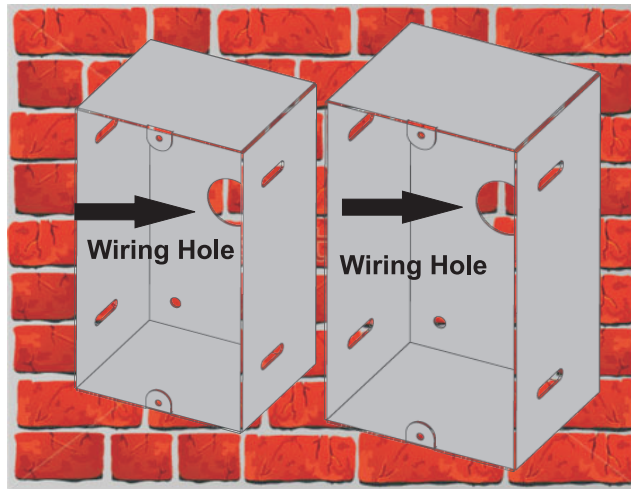5) Secure front face plate with the two(2) screws included.

Fig-1

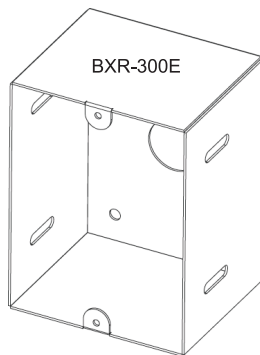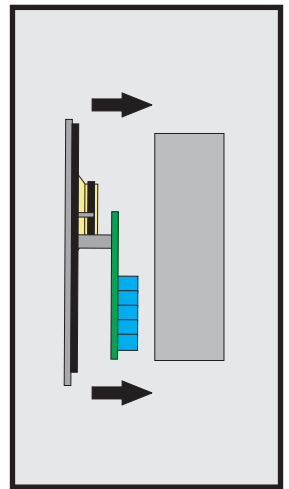Wiring Hole   Wiring Hole
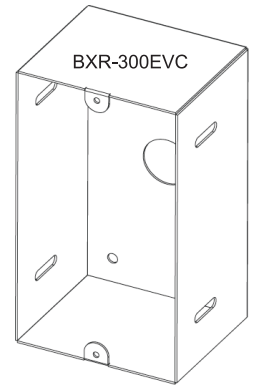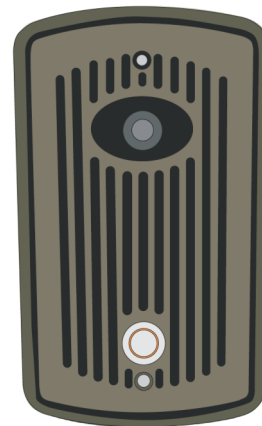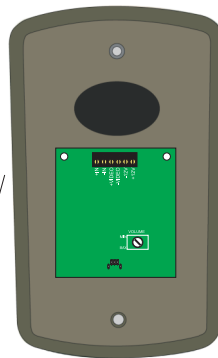
Fig-3 (Side view)

BXR-300E

Fig-2

BXR-300EVC

AUDIO ONLY MODEL SETUP

1) Connect IN- IN+ from C304CR to Speaker Audio IN- IN+

VIDEO MODEL SETUP

1) Connect 12 volt incoming power from 12 volt transformer *(supplied in kit)* into the terminals label +12V and -12V.

2) Connect the video output to your wires via the terminals labelled +VIDEO and -VIDEO.

+IN -IN +VIDEO -VIDEO -12V +12V

12V DC 500mA Output

VOLUME
MIN
MAX

Volume Control may need to be adjusted to accommodate for different acoustic environments.

Dedicated Monitor

OR   CATV Modulator   OR   DVR   OR   PC