

Home Automation Interoperability

ONVIF/ GENERIC/RTSP Instructions

IP Address: IP Address of TELEPORT controller

User Name:


Password:

RTSP Port: 554

URL Example: rtsp://192.168.0.100:554/

Username and Password can be left empty if you NVR allows. Anonymous viewing is enabled by default on the TELEPORT controller.

If anonymous credentials is not supported set up a password for the built in user “viewer” in the TELEPORT controller. The password should be set according to the viewer password listed for your controller device in your user profile.

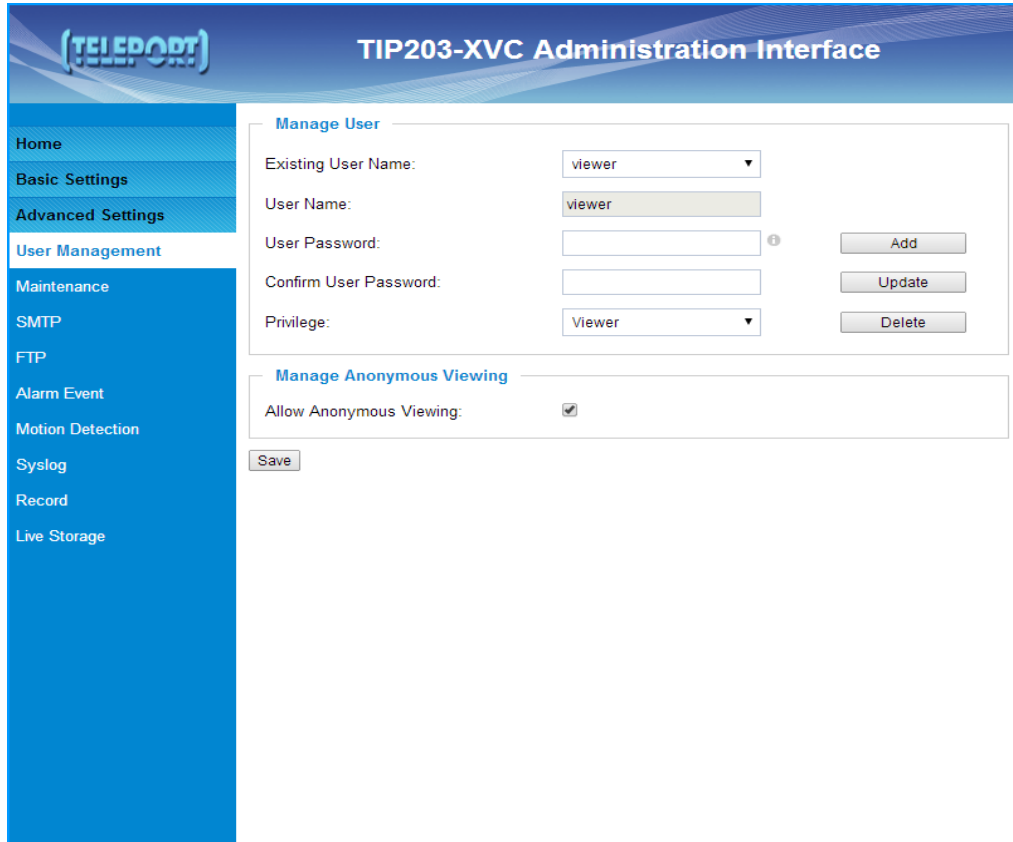

The screenshot displays the TELEPORT TIP203-XVC Administration Interface. On the left is a blue navigation sidebar with the following menu items: Home, Basic Settings, Advanced Settings, User Management (highlighted), Maintenance, SMTP, FTP, Alarm Event, Motion Detection, Syslog, Record, and Live Storage. The main content area is titled 'Manage User' and contains the following fields and buttons:

- Existing User Name: dropdown menu with 'viewer' selected.
- User Name: text input field with 'viewer' entered.
- User Password: text input field with an information icon (i).
- Confirm User Password: text input field.
- Privilege: dropdown menu with 'Viewer' selected.
- Buttons: 'Add', 'Update', and 'Delete'.

Below the 'Manage User' section is the 'Manage Anonymous Viewing' section, which includes:

- Allow Anonymous Viewing: checkbox checked.
- Save button.

Figure 1: TELEPORT controller>Advanced Settings>User Management

The screenshot shows the TELEPORT BY LOGENEX user profile Administer Devices>Device Info page. The page features a navigation bar with links for Home, Buy New Plans, Plans, Administer, Profile, and Logout. Below the navigation bar is a table with columns for Extension, Caller Name, Device Type, Device Info, FTP Info, Voice Mail, and Registration Info. The table lists extensions 1460 through 1468, all with the caller name 'Steve's Old CU'. The Device Info column for extension 1460 is highlighted with a yellow background and contains an information icon. A modal window titled 'SIP Settings' is open over the table, displaying the following information:

SIP Settings	
SIP Server:	logenex.teleportvideo.com
SIP User:	1460
SIP Password:	xiFyZc6Z
Group Number:	14601468
PIN Code:	7942
Direct Camera Access	
Admin:	12664803
Viewer:	51661228

Figure 2: TELEPORT user profile Administer Devices>Device Info

Motion JPEG URL

For home automation system that require a motion JPEG URL like Leviton/HAI etc.... You can use the following URL

<http://192.168.31.59/snapshot/view0.jpg>

You must program the home automation system url refresh at the required interval.